



PolyTile®



The need for an instant installation of tactile indicators shouldn't mean a compromise in safety. CTA PolyTile® self-adhesive tactile indicator tiles can be laid in minutes but still provide very high adherence to building safety requirements, and like all CTA products, they are built to last.


PolyTile® tactile guidance products are designed with a unique purpose: they are simple peel-and stick tiles which can be applied to almost any internal walkway, stairs or ramps to provide immediate compliance to the Australian Standards AS1428.

They are light weight, simple to install - just peel and stick, and provide builders the most effective and quick option for code compliance.

PolyTile® is also manufactured from polyurethane polymer which exceeds the wear resistance of steel, is easy and simple to install and does not compromise durability. Will not discolour, crack or degrade over time.

KEY FEATURES

- DIY peel and stick installation; no technical skills required
- Available in both hazard (stud) and directional (rib) profiles
- Strong PSA adhesive resists movement
- Available in six colours: terracotta, yellow, black, ivory, grey & sky blue
- AS4586 P5 slip resistance rating
- Highly cost effective
- Complies with all AS1428 tactile product design requirements.

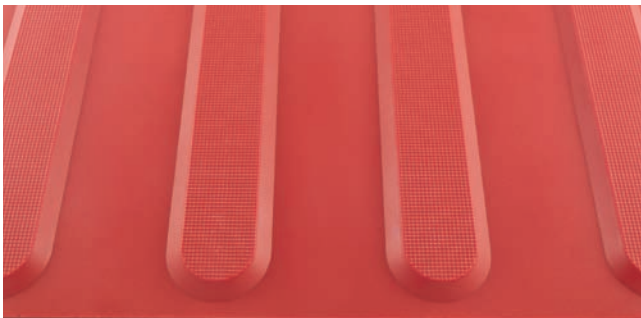

PRODUCT OPTIONS

COLOUR OPTION	PRODUCT CODE HAZARD STUD	PRODUCT CODE DIRECTIONAL STUD
Ivory	PTH-108	PTD-108
Yellow	PTH-112	PTD-112
Grey	PTH-155	PTD-155
Black	PTH-160	PTD-160
Sky Blue	PTH-130	PTD-130
Terracotta	PTH-124	PTD-124

MATERIAL

Manufactured from strong polyurethane polymer with very high wear resistance.

APPLICATIONS

Suitable for high traffic internal areas. Ideal for office buildings, apartments, transport and educational facilities.

DIMENSIONS

PolyTile® is manufactured in a standard tile size of 300x300mm with a square edge to ensure a tight butt joint with minimal gaps. 3mm Peel and Stick base with AS1428 compliant 5mm stud height.

INSTALLATION METHOD

PolyTile® Tactiles may be laid over most substrates in the same way as many other rubber or vinyl tiles. Lay out the area (ensuring 300mm from change of gradient) using a string line. Dry lay the tiles to ensure they are in the correct place and lie flat on the substrate. Peel the backing sheet from the tile and apply to the surface, following the string lines, once all the tiles have been laid, press down firmly so there is a good bond to the surface. See Product Installation sheet for comprehensive instructions.

CALL CTA ON 1300 282 282
TO ARRANGE A MEETING WITH A SALES CONSULTANT

VICTORIA | NEW SOUTH WALES | QUEENSLAND | WESTERN AUSTRALIA

PRODUCT DATA


Dimensions	300 x 300 x 3+5
Product Weight	420g
Packaging Size	300 x 300 x 300
Quantity in Package	36 (5.4 l/m)
Package Weight	15.2 kg
AS1428 Compliant	Yes
AS4586 (Hazard)	73 / P5
AS4586 (Directional)	73 / P5
NCC Compliant	Yes
Materials	Polymer
UV Stable	Yes
Warranty	2 Years
Life Expectancy	10 years
Indoor Use	Yes
Outdoor Use	Yes*

* When used with a suitable moisture barrier, refer to product installation instructions


COLOURS



INSTALLATION



HARD SURFACE



SOFT SURFACE / UNDERLAY REPLACEMENT

COMPLIANCE

All CTA products conform with the requirements of the Australian standards and are tested by NATA certified labs.

Please consult with CTA for relevant test reports:

- AS1428:2009 Design for access and mobility
- AS4586:2013 Slip resistance classifications for new pedestrian surface materials
- NCC - National Construction Codes

LUMINANCE CONTRAST

Please view the CTA Luminance Brochure for details or contact your CTA representative to discuss or request an onsite luminosity test.

WARRANTY

CTA provides a comprehensive warranty, in accordance with our published warranty statement which can be viewed on cobbletac.com.

CTA COMPLETE CARE MAINTENANCE

Asset owners have a Duty of Care responsibility to maintain access product within design performance parameters. CTA offers a fully integrated maintenance program which includes regular scheduled maintenance and replacement of worn components where necessary. Please contact your CTA representative for information on our "Complete Care Program."

CTA INSTALLERS

CTA's accredited installers are available to do the installation work for you - with short turnaround times and guaranteed workmanship. Our installation team is the largest and most experienced in the nation, so you can rest assured you are in safe hands.

MORE INFORMATION

Product Installation, list of Approved Products and Material Safety Data Sheets are available on request.

