

ABBHEY UNDERLAY 9F Product Specification

TECHNICAL SPECIFICATION

Total Thickness:	9mm ± 0.3
Nominal Density:	100kg/m ³
Laminate:	Polyethylene Laminate with Polypropylene mesh and fire retardant coating
Foam:	Re-bonded Polyurethane

PERFORMANCE SPECIFICATION


Flammability:	Radiant Panel Test AS/ISO 9239-1 CRF = 4.3 kw/m ² Smoke = 27 %mins Compliant with most building Classes
----------------------	---

PACKAGING INFORMATION

Roll Length:	10m
Roll Width:	1.85m
Roll Area:	18.5m ²

Date of issue: 15th August 2016

- Specifications are subject to normal manufacturing tolerances and may be altered without notice to improve this product.
- Product information believed to be correct at time of printing.

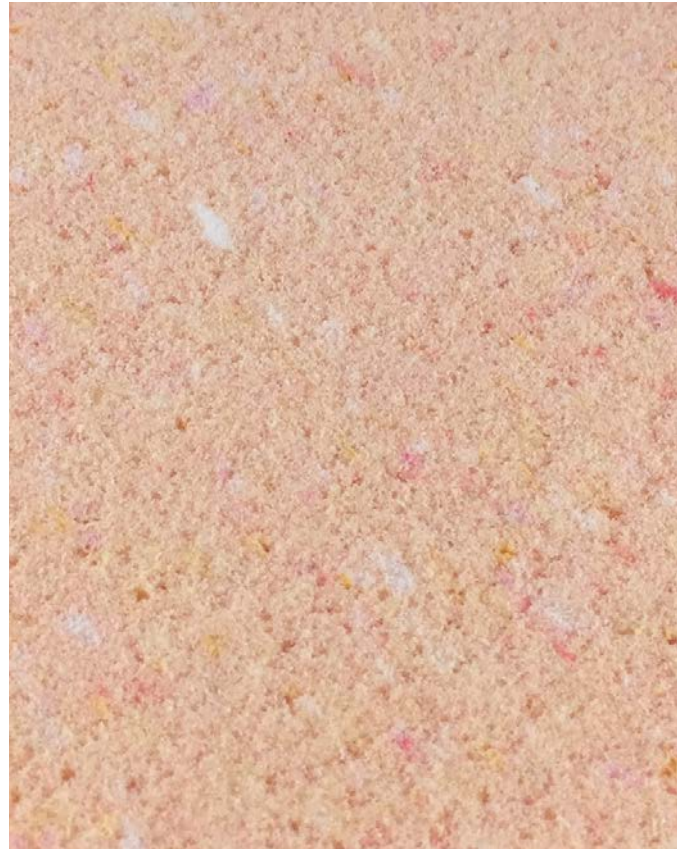

CALL CTA ON 1300 282 282
TO ARRANGE A MEETING WITH A SALES CONSULTANT
VICTORIA | NEW SOUTH WALES | QUEENSLAND | WESTERN AUSTRALIA

CTA 
WWW.CTAGROUP.COM.AU